


一、产品概述

※采用全套不锈钢（304、316L材质）卷板结构、防锈、耐腐蚀，适用于输送海水及物理性质类似于水的一般腐蚀性介质。


二、使用条件

- ※电泵潜入水下工作，深度不超过5m；
- ※介质温度：≤40℃；耐高温≤95℃；
- ※电机：绝缘等级F级，防护等级IP68；
- ※单相泵：内装保护开关；
- ※水的PH值为4-10；
- ※其它：单相泵可选配浮子开关。


三、产品照片与结构简图

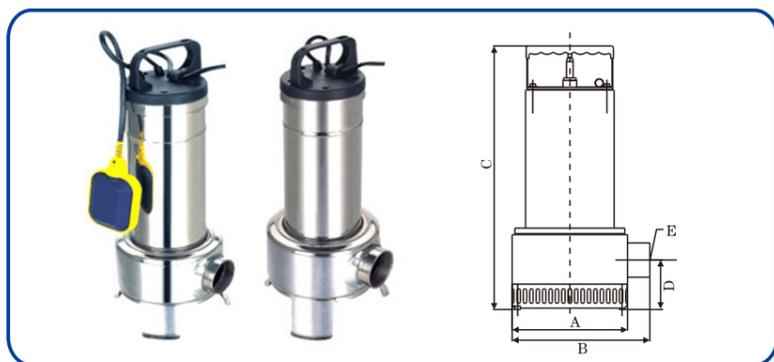

四、性能曲线

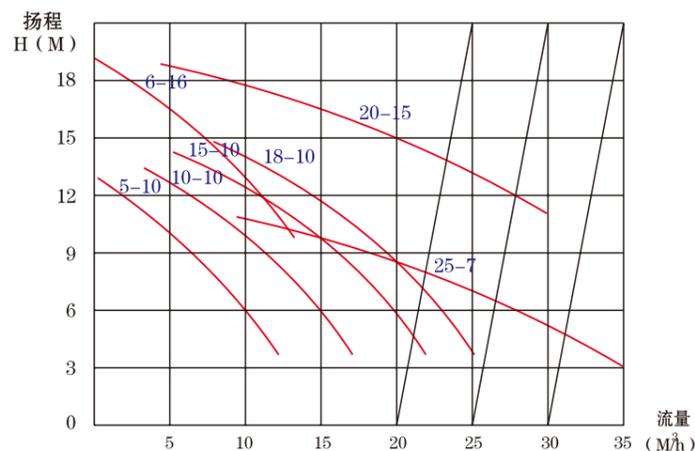

五、型号说明

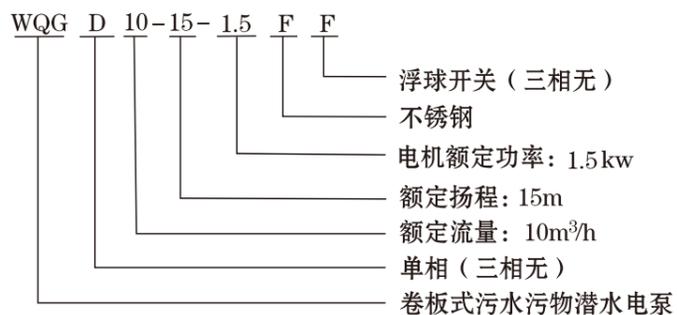

六、规格型号表

产品型号 TYPE	流量 m³/h	扬程 m	功率 KW	可选电压 V	口径 mm	尺寸 mm	净/毛重 KG
WQG7-7-0.55F	7	7	0.55	220/50, 380/50	50	220 × 220 × 485	11
WQG20-5-0.75F	20	5	0.75	220/50, 380/50	65	220 × 220 × 505	12
WQG15-7-1.1F	15	7	1.1	220/50, 380/50	65	220 × 220 × 515	13
WQG7-15-1.1F	7	15	1.1	220/50, 380/50	65	150 × 150 × 633	18
WQG9-7-1.1F	9	7	1.1	220/50, 380/50	50	300 × 220 × 470	28
WQG25-7-1.5F	25	7	1.5	220/50, 380/50	65	220 × 220 × 535	14
WQG10-15-1.5F	10	15	1.5	220/50, 380/50	65	220 × 220 × 535	14
WQG9-22-2.2F	9	22	2.2	380/50	40	220 × 220 × 580	22
WQG15-15-2.2F	15	15	2.2	380/50	50	220 × 220 × 580	22
WQG25-10-2.2F	25	10	2.2	380/50	65	220 × 220 × 580	30
WQG35-7-2.2F	35	7	2.2	380/50	65	220 × 220 × 580	30
WQG25-15-3F	25	15	3	380/50	65	220 × 220 × 580	30
WQG37-10-3F	37	10	3	380/50	80	220 × 220 × 580	29
WQG50-10-4F	50	10	4	380/50	80		34.5
WQG75-7-4F	75	7	4	380/50	100		34.5
WQG12-33-4F	12	33	4	380/50	50		37
WQG25-30-5.5F	25	30	5.5	380/50	50		35.5
WQG30-22-5.5F	30	22	5.5	380/50	50		72
WQG45-15-5.5F	45	15	5.5	380/50	80		72
WQG70-12-5.5F	70	12	5.5	380/50	100		75
WQG100-10-5.5F	100	10	5.5	380/50	100		80
WQG140-7-5.5F	140	7	5.5	380/50	150		150
WQG45-22-7.5F	45	22	7.5	380/50	80		150
WQG70-15-7.5F	70	15	7.5	380/50	80		150
WQG100-14-7.5F	100	14	7.5	380/50	100		150
WQG145-10-7.5F	145	10	7.5	380/50	150		170
WQG210-7-7.5F	210	7	7.5	380/50	150		170
WQG20-40-7.5F	20	40	7.5	380/50	50		85
WQG30-32-7.5F	30	32	7.5	380/50	50		85